



TO AMARWARA TO RAMGARH

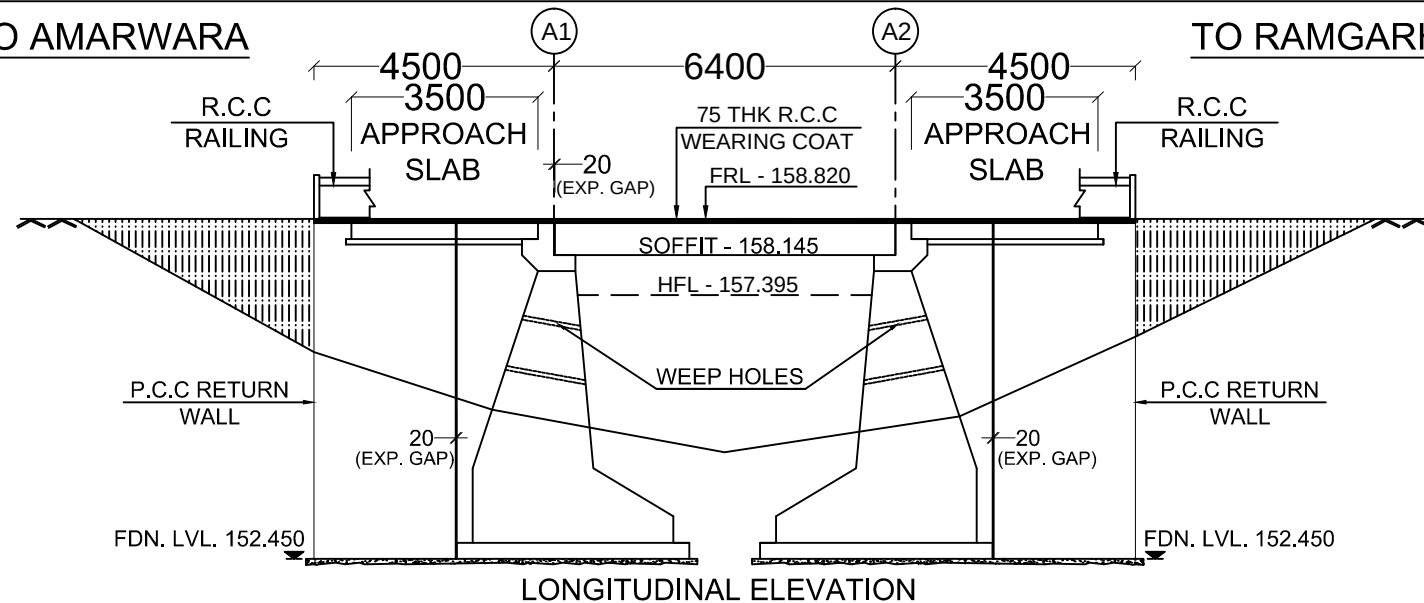


LONGITUDINAL ELEVATION


GROUND LEVEL (m)	158.820	157.158	155.843	155.035	154.450	154.938	157.936	157.350	158.820
FOUNDING LEVEL (m)	152.450	152.450	152.450	152.450	152.450	152.450	152.450	152.450	152.450
CHAINAGE (m)	3.3278	3.3308	3.3338	3.3368	3.340	3.3432	3.3462	3.3492	3.3522

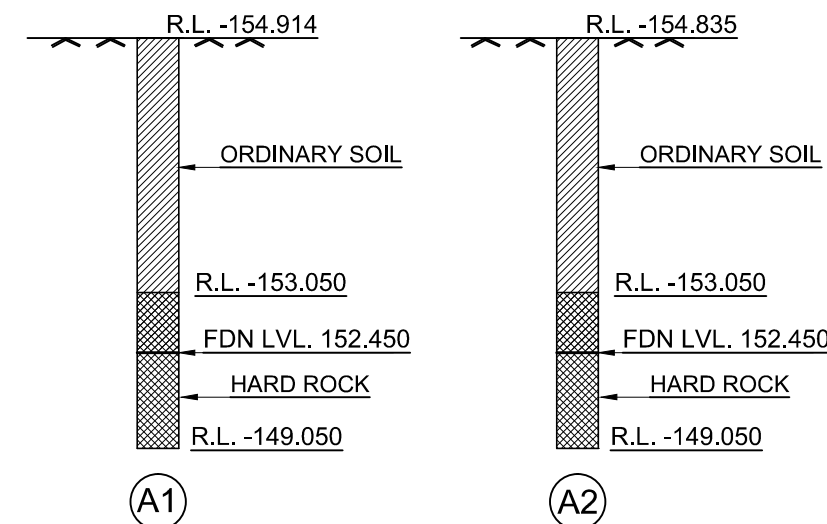

BORE HOLE RESULTS

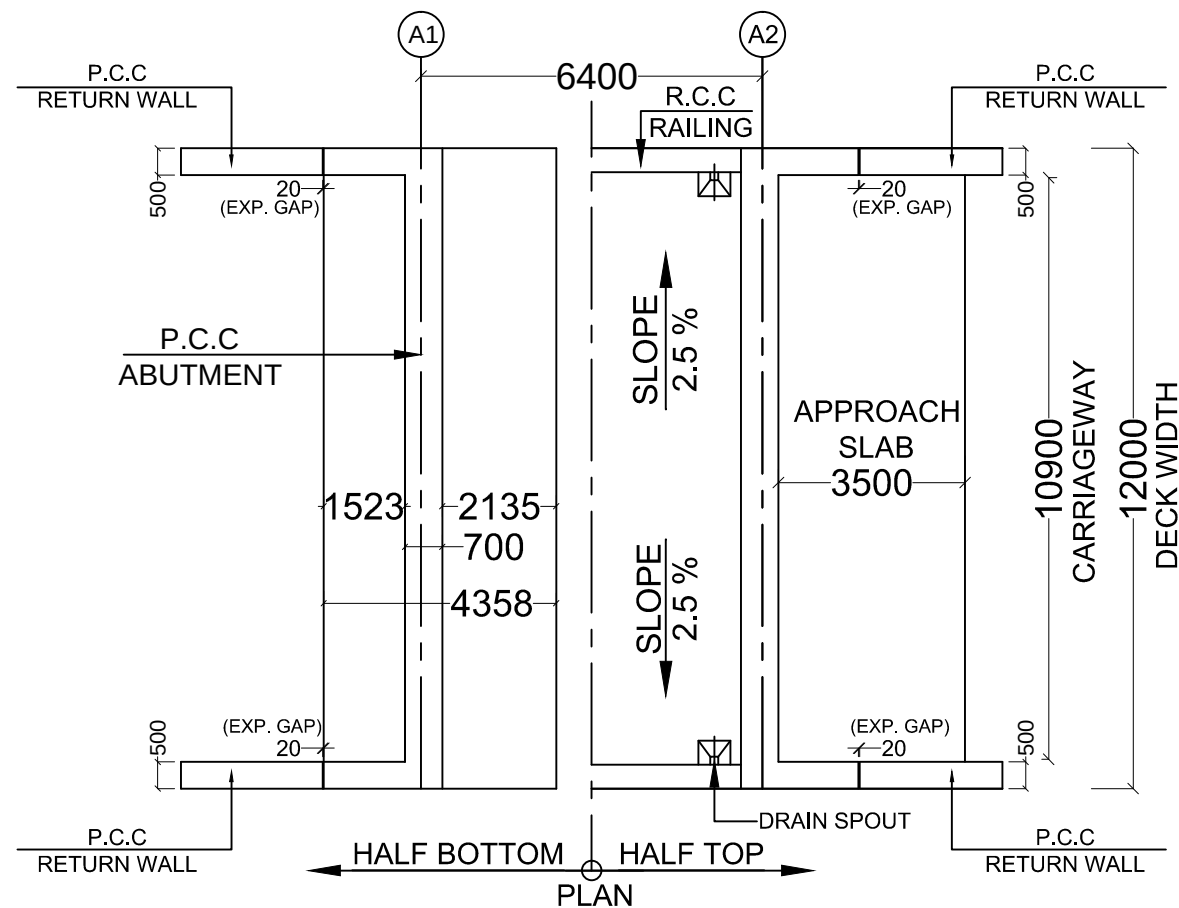

PLAN

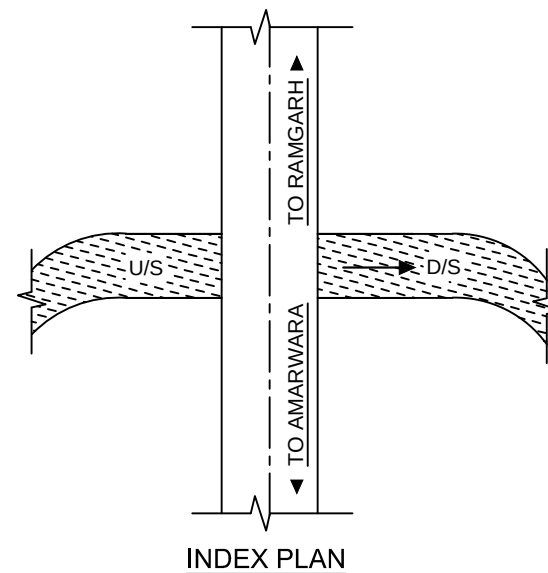

INDEX PLAN

NOTES :-

- TYPE OF BRIDGE - HIGH LEVEL
- SPAN ARRANGEMENT - 1 X 6.0 M (TOTAL LENGTH OF BRIDGE 6.4 M)
- OVERALL WIDTH - 12.0 M
- CARRIAGEWAY WIDTH - 10.9 M
- FORMATION LEVEL - 158.820 M
- SOFFIT LEVEL - 158.145 M
- H.F.L. - 157.395 M
- L.W.L. -
- FOUNDATION LEVEL - VARIABLE
- TYPE OF FOUNDATION - OPEN FOUNDATION
- TYPE OF SUBSTRUCTURE
 - A) ABUTMENT - P.C.C. (M-20)
 - B) ABUTMENT CAP, & DIRT WALL - R.C.C. (M-25)
 - C) RETURN WALL - P.C.C. (M-20)
- TYPE OF SUPERSTRUCTURE - R.C.C. SOLID SLAB (M-25)
- WEARING COAT - 75 MM R.C.C. WEARING COAT
- APPROACH SLAB - R.C.C. M-30
- R.C.C. RAILING - R.C.C. M-30
- DESIGN LOADING - ONE LANE OF CLASS 70R FOR EVERY TWO LANES WITH ONE LANE OF CLASS A FOR THE REMAINING LANES, IF ANY, OR ONE LANE OF CLASS A FOR EACH LANE.
- SOIL BEARING CAPACITY - ABUTMENT - 30 T/ SQ.M.
- SEISMIC ZONE - III
- ALL DIMENSIONS ARE GIVEN IN MM UNLESS SPECIFIED.
- THE FOUNDATION DEPTH IF INCREASES UP TO 1.0M THE SAME DESIGN MAY BE FOLLOWED AND IF MORE THAN 1.0M THAN REFER THE DESIGNER.
- DRAWING NOT TO SCALE.

CLIENT :-



Executive Engineer
MP PWD Division
CHHINDWARA

SUBMITTED BY :

CONTRACTOR. :- M/s RAJARAM CONSTRUCTION

CONSULTANTS :

SAWYTECH ENGINEERING SERVICES

PROJECT :-

AMARWADA - RAMGARH ROAD

TITLE :-

GENERAL ARRANGEMENT DRAWING
CH.- 3+340

Dwg No. : MPPWDC / AR / 01

REVIEWED BY :-

SUB ENG.

SUB DIV. OFFICER

EXECUTIVE ENG.